



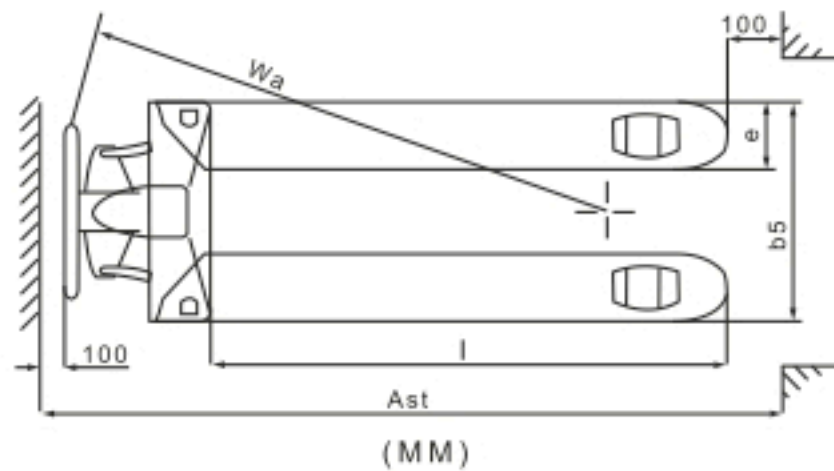

Heavy duty pallet truck
WB

- Capacity **5000 kg**
- Strengthened forks for a reliable quality.

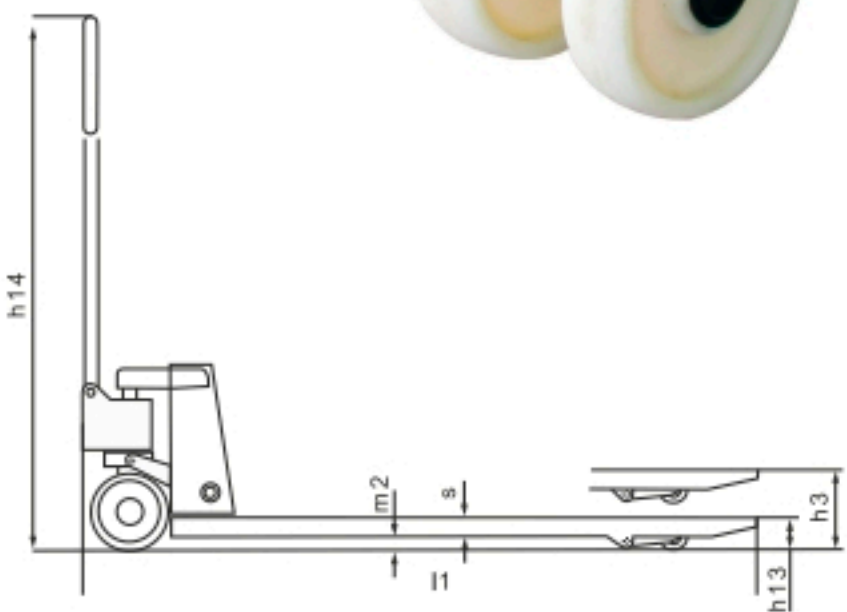

| Specification | 1 | Model | WB |
|---------------|----|----------------------------|--------------------------|
| | 2 | Load capacity | Q(kg) 5000 |
| | 3 | Tyre size, front | mm Φ 200 |
| | 4 | Tyre size, rear | mm Φ 80 |
| | 5 | Lifting height | h_3 (mm) 207 |
| | 6 | Lowered fork height | h_{13} (mm) 88/77 |
| | 7 | Overall length | l_1 (mm) 1620 |
| | 8 | Fork dimensions | s/e/l 57/160/1220 (1150) |
| | 9 | Distance between fork-arms | b_5 (mm) 685/550 |
| | 10 | Net weight | kg 110 |



Galvanized pallet truck
BFG

- Capacity **2500kgs,3000kgs**
- Ideal for wet and cold warehouse.



Stainless Steel Pallet Truck
BFS

- Capacity **2500kgs**
- Ideal for food, chemical, pharmaceutical.

| Specification | 1 | Model | BFG | BFS |
|---------------|----|----------------------------|-------------------------------|----------------------------|
| | 2 | Load capacity/rated load | Q(kg) 2500/3000 | 2500 |
| | 3 | Net weight | kg 70-80 | 65-80 |
| | 4 | Tyre size, front | mm Φ 180*50 | Φ 180*50 |
| | 5 | Tyre size, rear | mm Φ 80*70/ Φ 74*70 | Φ 80*70/ Φ 74*70 |
| | 6 | Lifting height | h_3 (mm) 200/190 | 200/190 |
| | 7 | Lowered height | h_{13} (mm) 85/75 | 85/75 |
| | 8 | Overall length | l_1 (mm) 1534/1604 | 1534/1604 |
| | 9 | Fork dimensions | s/e/l 54/160/1150(1220) | 45/160/1150(1220) |
| | 10 | Distance between fork-arms | b_5 (mm) 520/550/685 | 520/550/685 |
| | 11 | Turning radius | W_a (mm) 1249/1319 | 1266/1334 |